

RESPONSIVE

We listen. We're responsive.

Canopus Platinum®

Anti-Slip - Phthalate Free

2018



Special Features



Applications

- Transport
- Airports, trains and ferry
- Ramps
- Elevated Corridor access
- Life areas and entrances
- Kitchens or wet areas
- Industrial locations
- Heavy duty and heavy traffic areas

Product Description

Canopus Platinum® is an anti-slip fully flexible vinyl floor covering 2.00 mm thick with silicon carbide crystals and coloured chips for a decorative design with R11 slip resistant properties. The product has a 1.00 mm wear layer and is reinforced with a glass fibre grid for extra dimensional stability.

The SureClean™ surface treatment replaces wax and polish after installation without reducing the anti-slip properties of the flooring and providing a high level of dirt resistance and ease of maintenance.

Canopus Platinum® is antifungal and antibacterial, complies with the EN 649 norm (34 / 43) and has a group T wear rating.


Canopus Platinum® is suitable for transport applications such as buses, trains, ships and airplanes. It is also applicable for non-slip performance in commercial and industrial areas. It is the ideal solution for heavy traffic applications where enhanced slip resistance, aesthetic beauty and easy maintenance are required.

Canopus Platinum® is VOC ($\leq 1/2$ Chronic REL) and formaldehyde compliant ($\leq 9.0 \mu\text{g}/\text{m}^3$) according to the CDPH/EHLB/Standard, Method V1.1-2010 (certificate 120316-01).




Super Abrasion

Stylish, soft and classy, Canopus Platinum® defines elegance for safety floors. The range has a carefully constructed colour palette and is uniquely complemented by superior performance characteristics. With endless possibilities of application areas, Canopus Platinum® is far ahead of its time.

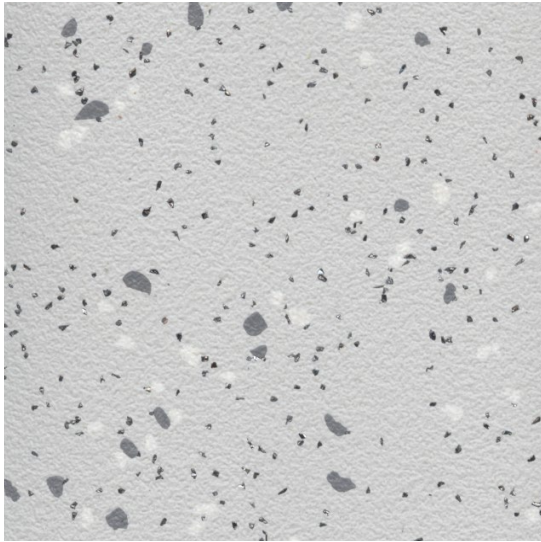


PLAT - 01

Ice Age




PLAT - 04

Cement




PLAT - 05

Concrete




PLAT - 08

Ash Grey




PLAT - 12

Carbon




PLAT - 02

Iron Ore




PLAT - 03

Ecrú




PLAT - 06

Sun Spots




PLAT - 07

Alpine Green




PLAT - 10

Shadow Dance



PLAT - 09

Atlantic Blue



PLAT - 11

Sapphire

Matching welding rods are available for every colour.
Printed shades may appear slightly different from actual samples.

Canopus Platinum®

Anti-Slip - Phthalate Free



Characteristics	Standards	Units	Canopus Platinum®
Phthalate Free			Yes
Indoor Air Quality	CA Section 01350 ($\leq 0.5 \text{ mg/m}^3$)	Floorscore Certified (SCS - FS - 04547)	Yes
	ISO 16000-6, TVOC after 28 days	$\mu\text{g/m}^3$	< 10 (Fully compliant)
Description			
Type of floor covering	EN 13845 EN 13553	Classification	Safety Vinyl Flooring
General Performance	ISO 10874 - EN 685		34: Very Heavy Commercial 43: Heavy Light Industrial
Usage / Wear Resistance	BS EN 649	Group	T ($\leq 2 \text{ mm}^3$)
Special Treatment			Anti-slip surface with silicon carbide granules. SureClean™
Overall Thickness	ISO 24346 - EN 428	mm	2.00
Weight	ISO 23997 - EN 430	g/m^2	3200
Sheet Size	ISO 24341 - EN 426	m (width)	2
		m (length)	20
		m^2 (surface area)	40
Castor chair test	ISO 4918 - EN 425	Type of use	Continuous
Slip resistance	EN 13845	Wear Resistance Rating	ESf & ESb ($\leq 10\%$ particles lost over 50,000 cycles)
	DIN 51130	Ramp Test	R 10
	BS 7976 - 2	Wet Pendulum Test	36+ (Low Slip Potential)
	AS 4586 - 2013 Appenix A		P4
	EN 13893 ASTM D2047	Coefficient of friction	DS (< 0.30) Pass (0.70 Avg)
Dimensional stability	ISO 23999 - EN 434	%	≤ 0.40
Flexibility	ISO 24344 - EN 435	20mm mandrel	< 20
Seam Strength	ISO 16906	N/50mm	Pass
Residual indentation	ISO 24343 - 1 - EN 433	mm	≤ 0.10
	ASTM F970	psi	800
Colour fastness to light	EN ISO 105 - B02	Degrees	≥ 6
	ASTM F1515	$\Delta E \leq 800$ after 300 hours (colour change)	Pass
Static electrical propensity	EN 1815	kV	< 2.0
Thermal resistance	EN 12667	$\text{m}^2 \text{ k/W}$	Approx 0.01 $\text{m}^2 \text{ k/W}$ (suitable at 27°C)
Heat Stability	ASTM 1514	$\Delta E \leq 0.80$ (colour change)	Pass
Reaction to fire	EN ISO 9239-1	kW/m^2	≥ 8
	EN ISO 11925-2		Pass
	EN 13501-1 : 2007+A1	Class	Bfl - S1
	ASTM E 648	Type	1
Smoke density	ASTM E 662	Dm	< 450
Stain & chemical resistance	ISO 26987 - EN 423	Index	0 (Excellent resistance)
Maritime usage	IMO RES A 653 (16)		Annex 1 Part 2 (Smoke & Toxicity)
	IMO MSC 61 (67)		Part 5 (Spread of Flame) and Annexure 2
	Marine Equipment Directive		1121

